



# ES 12 - 6

## 6V - 12 Ah



### Electrical specifications

Nominal Voltage	6 V	
Capacity 25°C to 1,8V/c	20 hour rate	11,8 Ah
	10 hour rate	10,9 Ah
	8 hour rate	10,2 Ah
	3 hour rate	8,7 Ah
	1 hour rate	6,2 Ah
Self discharge @ 25°C	per month	2,5 - 3 %
Internal Resistance	fully charged	approx 10 mΩ
Maximum current @ 25°C	charging	3,6 A
	discharging (5sec)	180 A
Charge Voltage @25°C	Float (-9mV/°C)	2,27 - 2,29 V/Cell
Charge Voltage @25°C	Cyclic (-15mV/°C)	2,41 - 2,48 V/Cell


### Other specifications

Design Floating Life @ 20°C	3-5 Years	
Dimensions LxWxH (± 1mm)	151x50x94 mm	
Total height	100 mm	
Operating Temperature (storage)	-20 to +50 °C	
Separator	Absorbent Glass Mat	
Grid alloy	Calcium / Tin lead alloy	
Case and cover	ABS	
Electrolyte	Sulphuric Acid	
Terminal / Length	.187 (F1)	faston
Optional terminal types	none	
Torque setting	none	Nm
Weight	1,75 (±5%) kg	

### Innovative Features

- Completely maintenance free, sealed construction eliminates the need for adding water
- Fully tank formed plates
- Analytical grade electrolyte
- Spill proof / leak proof
- Valve regulated Max internal pressure 2,5 psi
- Multi-position usage
- ABS Case and cover (V0 optional)
- Low self discharge
- FAA and IATA approved as non-hazardous
- Built to comply with IEC 8962, DIN 43534, BS 6290 Pt4, Eurobat

### Dimensions

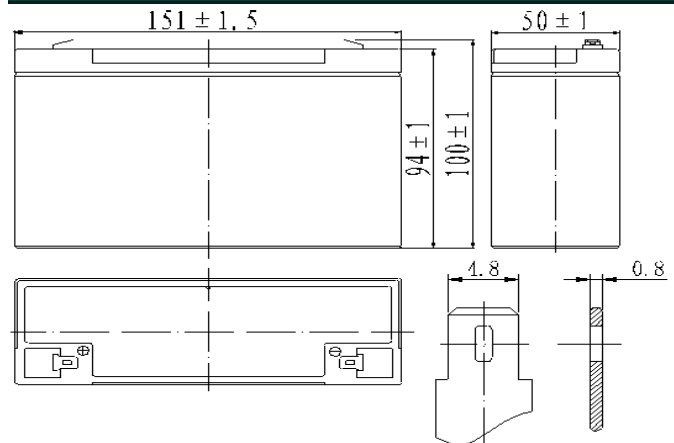

### Constant Amps Discharge - Amps at 25°C

V/Cell	5m	10m	15m	20m	25m	30m	35m	40m	45m	50m	55m	60m	90m	2h	3h	4h	5h	6h	7h	8h	9h	10h	12h	20h
1,80	38,3	22,8	18,4	14,6	11,6	10,7	9,50	8,58	7,66	7,24	6,73	6,20	4,64	4,03	2,92	2,33	1,98	1,67	1,45	1,28	1,16	1,09	0,94	0,59
1,75	41,0	24,1	19,6	15,5	12,4	11,1	9,86	8,90	7,96	7,51	6,89	6,38	4,80	4,14	3,00	2,40	2,04	1,70	1,48	1,32	1,20	1,12	0,96	0,60
1,70	42,8	25,2	20,2	16,1	12,8	11,4	10,3	9,16	8,18	7,67	7,08	6,53	4,91	4,20	3,02	2,41	2,05	1,72	1,49	1,33	1,21	1,13	0,97	0,60
1,65	44,9	26,3	20,9	16,6	13,4	11,8	10,6	9,54	8,41	7,82	7,30	6,72	5,09	4,24	3,05	2,44	2,06	1,73	1,50	1,34	1,22	1,13	0,97	0,60
1,60	45,8	27,1	21,5	17,0	13,7	12,0	10,6	9,61	8,58	7,92	7,34	6,78	5,10	4,26	3,06	2,45	2,08	1,74	1,52	1,34	1,22	1,13	0,97	0,61

### Constant Power Discharge - Watts per Block at 25°C

V/Cell	5m	10m	15m	20m	25m	30m	35m	40m	45m	50m	55m	60m	90m	2h	3h	4h	5h	6h	7h	8h	9h	10h	12h	20h
1,80	201	121	98,4	78,6	62,4	57,8	51,4	46,6	41,6	39,6	37,0	34,3	25,8	22,6	16,6	13,4	11,5	9,72	8,52	7,56	6,90	6,48	5,63	3,54
1,75	215	127	104	83,4	66,0	59,9	53,2	48,2	43,1	41,0	37,8	35,2	26,6	23,1	17,0	13,7	11,8	9,90	8,64	7,74	7,08	6,54	5,75	3,57
1,70	223	133	107	86,4	69,0	61,2	55,6	49,4	44,3	41,7	38,7	35,9	27,1	23,3	17,2	13,8	11,8	9,96	8,70	7,80	7,14	6,60	5,76	3,58
1,65	233	138	111	88,8	71,4	63,0	56,7	51,4	45,4	42,4	39,8	36,8	28,1	23,5	17,2	13,9	11,9	9,96	8,70	7,86	7,20	6,66	5,76	3,61
1,60	238	142	114	90,6	73,2	64,2	56,9	51,5	46,1	42,8	40,0	37,1	28,1	23,6	17,3	13,9	11,9	10,0	8,82	7,86	7,20	6,66	5,77	3,65

Revision: 201509-1

Your Wing Dealer :



Wetac Stand-By BV  
Galvanistraat 117  
6716 AE EDE  
The Netherlands

tel.  
fax.  
web  
info

+31 (0) 318 696 190  
+31 (0) 318 696 191  
www.wetac.nl  
info@wetac.nl

